



Tyre Solutions

Suitable for all
Magni Ranges

MCT
EQUIPMENT

Think different, lift different



Introducing the Magni Tyre Handler Range

Not your traditional tyre handler – redefined with cutting-edge solutions

Benefits of the TH Range

Safe, strong and reliable the fixed telehandler range combines craftsmanship with innovation and technology, with high-end performance in each application. The TH range is flexible and adapts to your needs: from industry to construction and mining sectors.

Benefits of the HTH Range

The heavy-duty telehandler range has a payload between 10 and 50 tonnes and are ideal for heavy-duty tasks in manufacturing, ports and mining. The HTH range guarantees maneuvering speed and stability, with exceptional performance and reliability in extreme conditions.

Suitable for all mining [underground and surface operations] but not limited to a dedicated tyre handler.



Tyre Handling Attachment Features

- ⚙ Pressure loss alarm system
- ⚙ +/- 300mm side shift
- ⚙ 1,120mm to 4,250 opening and closing range
- ⚙ Tyre rotation +/- 400 degrees
- ⚙ Tyre forward and backward rotation full 360 degrees
- ⚙ Tyre handling up to 63inch
- ⚙ Remote control capability
- ⚙ Precision operations

Safety Features


- ⚙ External remote-control capabilities
- ⚙ Unrestricted cabin view
- ⚙ Camera positioned at the head of the boom [optional]
- ⚙ Dynamic live load charts [LMI system]
- ⚙ Pressure loss alarm system
- ⚙ Pedestrian warning systems [optional]
- ⚙ 360-degree camera view [optional]
- ⚙ Hydraulically controlled fallback arrests
- ⚙ Levelling of tyres

Tyre Handling Attachments Range


2.5 ton | 3.5 ton | 3.8 ton | 8 ton | 16 ton



Range 3.5 ton | 8 ton | 16 ton

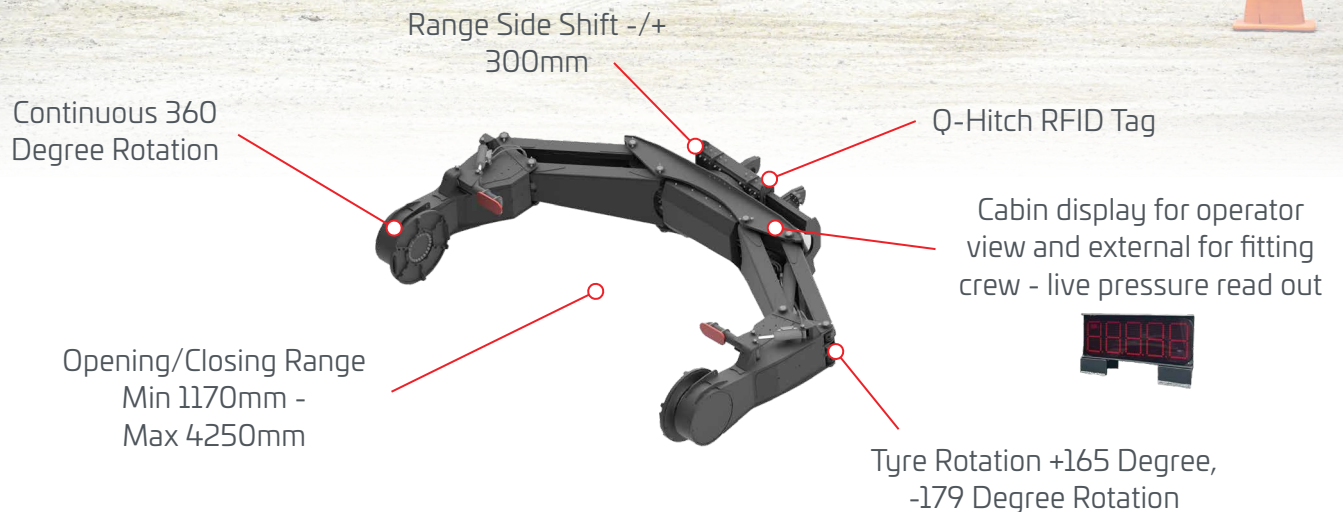

Range 2.5 ton to 3.8 ton

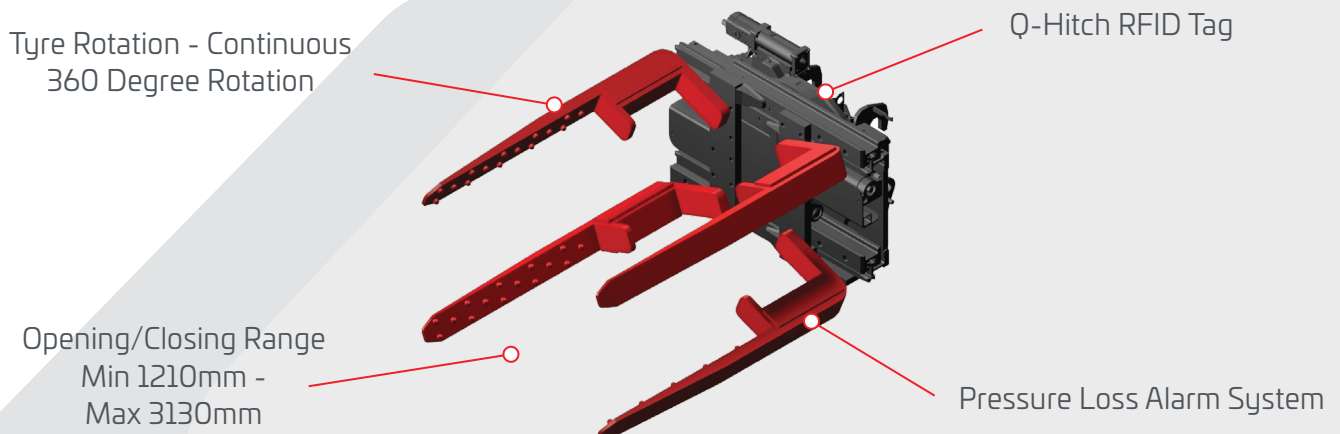



MCT EQUIPMENT

Think different, lift different



Watch the attachment
live in action!

