

CX5-L

Specifications



Lifting capacity double circuit:	250 - 500 kg
Machine weight:	50 kg
Rotation range:	360° with four locking positions
Tilting range:	90° with three locking positions
Machine height:	240 mm
Battery:	12 VDC, 9 Ah

The vacuum lifter for glass up to 500 kg. Standard equipped with a double circuit. The various configurations make this machine our all-rounder, suitable for small and large projects.

Unique features

- Lightweight 40 kg base unit with 250 kg SWL
- Expandable up to 2200 mm and 500 kg SWL
- Compact base dimensions of 800 x 400 mm
- Full double circuit for highest possible safety
- Machine weight: 50 kg

Delivered standard with:

- Remote control
- Transport trolley
- Swappable battery system incl. spare battery
- Protective cover

Accessories



Battery charger



Remote control




Hoisting arm extension

Specifications

- Manual tilting with three locking positions and continuous adjustment
- Manual rotation with four locking positions
- Radio remote control for suction and release
- Interchangeable lifting point for lower overall height
- Transport trolley with pneumatic tyres

Dimensions

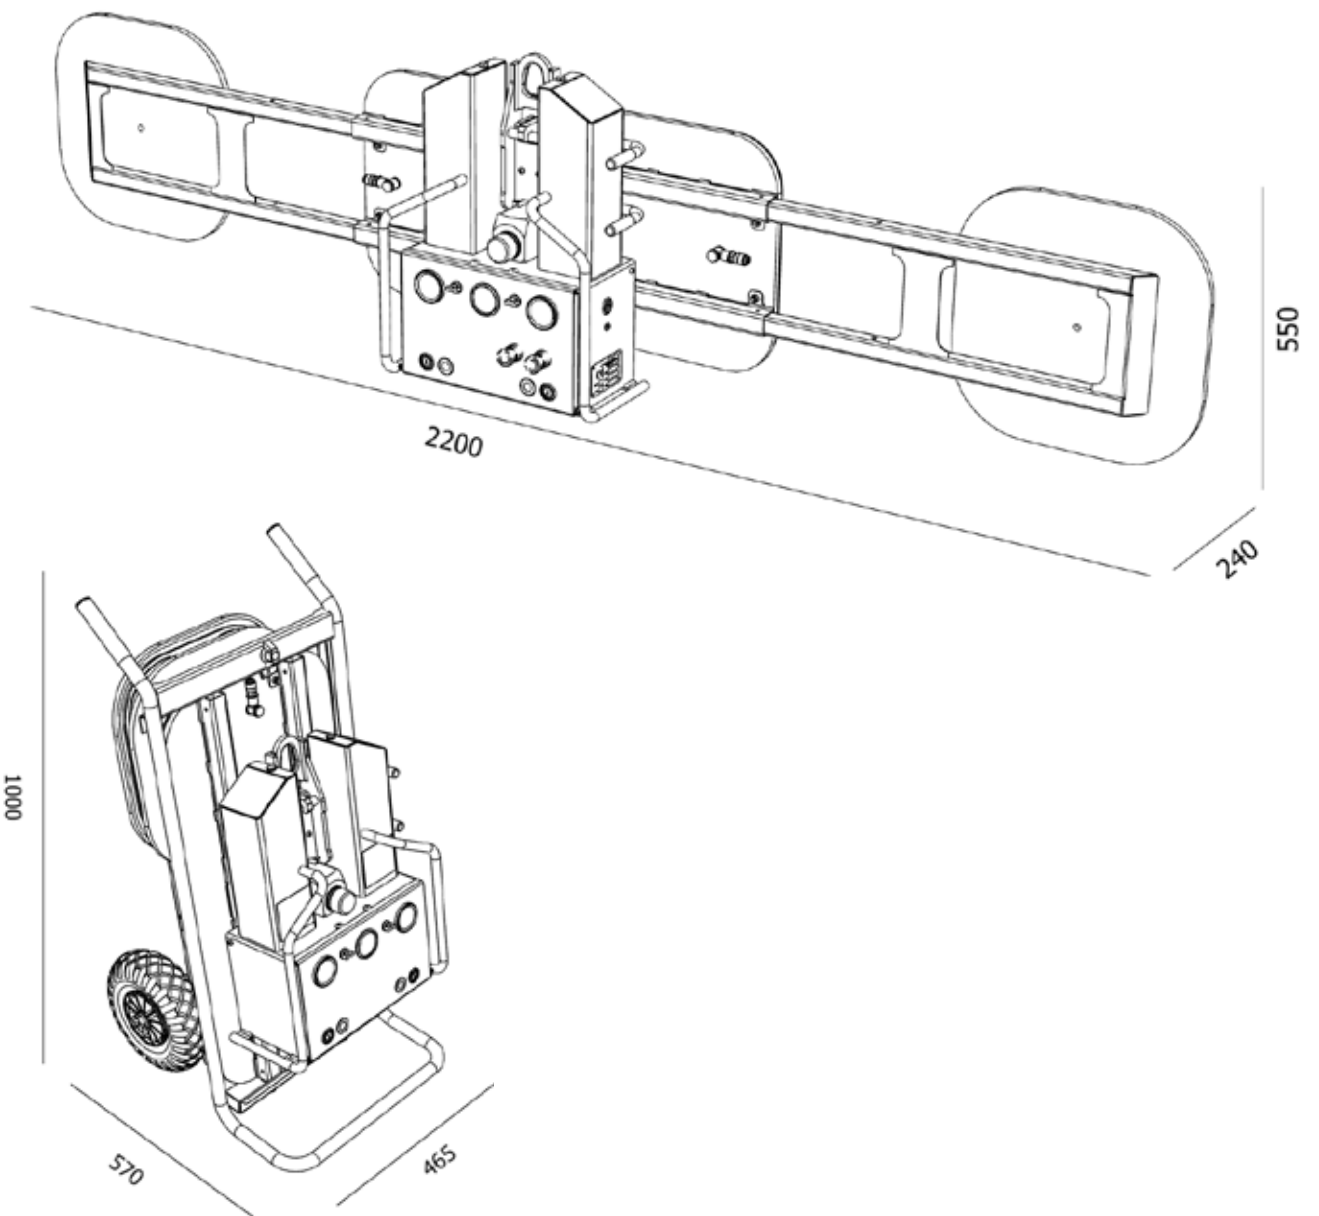

Your Hoeflon contact person

Hoeflon machines are functional and offer optimal power and reliability.
We offer many possibilities and help you come up with solutions.

